

FIXED POINT PIPE CLAMP Type **116-305P LA**
 for installation on i-beam
 DP 40 35 434 **116-305P LA-2**

Type 116-305P LA

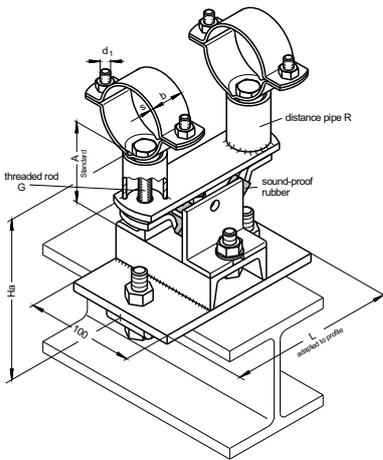
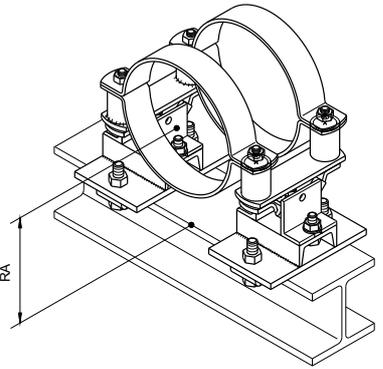


Type 116-305P LA-2



SOUND INSULATED
 according to
 DIN 4109

All dimensions in mm

Type	Pipe ø	b x s	A	RA	Ha	d	d ₁	Threaded rod G	Distance pipe R	L	
116-305P LA 	21.3 26.9 33.7	20x1,5	105	154 156,5 160	143	M12	M6	M8	3/4" Pipe	adapted to beam	
	42.4 48.3 57.0	20x2,0	105	164 167 171,5	143	M12	M6	M8	3/4" Pipe		
	60.3 76.1 88.9 108.0 114.3 133.0 139.7 159.0 168.3	30x2,5	110	178 186 192,5 202 205 214,5 218 227,5 232	148	M12	M8	M10	1" Pipe		
116-305P LA-2 	76.1 88.9 108.0 114.3 133.0 139.7 159.0 168.3	30x5,0	75 68 59 56 46 43 33 29	151	112,5 106 96,5 93 84 80,5 71 66	M12	M10	1" Pipe			
	219.1 273.0	40x6,0	35,5 8,5	183	42 15				M12		
Other diameters on request. Please tell us the requested pipe diameter and the size of the beam.											